


D01d: UC^{FIBRE} | T LSHF-FR D_{ca} ES9 3.0 2

Assembly, Fig.8, 2 units of 3.0 mm, aramid yarn, FireRes sheath

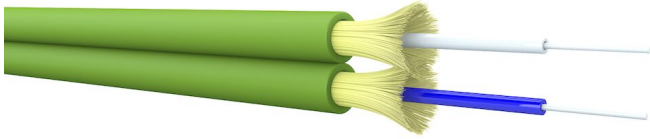

GENERAL INFO

3.0mm x 2 duplex cable with ES9 buffer, aramid yarns and FireRes® sheath: DIN/VDE: J-V(ZN) H 2

CERTIFICATIONS AND DESIGN STANDARDS

ISO/IEC 11801	Generic telecom cabling for customer premises
EN 50173	Information technology - Generic cabling systems
IEC 60794-1-1	Generic Specification Fibre Optic Cables
IEC 60794-1-21	Mechanical Test Methods
IEC 60794-1-22	Environmental Test Procedures
EN 50575	Cables in construction works subject to reaction to fire

APPLICATION PROPERTIES

Resistant to UV	
Operation temperature (min) [°C]*	-30 and (max) [°C] 60
Installation temperature (min) [°C]	-10 and (max) [°C] 60
Storage temperature (min) [°C]	-10 and (max) [°C] 60
Bending radius (rule)	During installation (loaded) = 20xOD, Permanent (unloaded) = 10xOD

CABLE CONSTRUCTION

Type of tube	2 ES9 easily strippable tightly buffered fibres 900µm ± 50µm
Material outer sheath	Low smoke zero halogen, FireRes®
Cable shape	Flat
Cable marking example	PRYSMIAN UC ^{FIBRE} T N LSHF-FR ES9 3.0 2 'Fibre type' 'Fibre brand' 'Item No' 05 'Batch Number' 'Meter mark' J-V(ZN)H 2 'Fibre family' 'Mode field diameter' /125 'Transmission Class'

IDENTIFICATION

Tight buffer colour code for Simplex	White
Tight buffer colour code for Duplex	White and Blue
<i>* Fibre is white or uncoloured.</i>	
Tube unit and sheath colour code	Cable with SM fibres: BendBrightXS G.657.A2, BendBright G.657.A1 Yellow, RAL 1018 Cable with mixed fibre types (hybrid) Blue, RAL 5015 Cable with OM1 Grey, RAL 7037 Cable with MaxCap-BendBright-OM2 Orange, RAL 2009 Cable with MaxCap-BendBright-OM3 Aqua, RAL 6027 Cable with MaxCap-BendBright-OM4 Erika-Violet, RAL 4003 Cable with BendBright WideCap-OM5 Lime-Green, RAL 6039

MECHANICAL PROPERTIES

Outer diameter	2.9 x 5.8 mm
Cable weight	15 kg/km
Fire load	270 MJ/km
Crush test	IEC 60794-1-21 E3 500 N/10cm
Torsion test *	IEC 60794-1-21 E7 5 cycles ±1turn
Impact test	IEC 60794-1-21 E4 5 N·m
Max. tensile strength during installation	IEC 60794-1-21 E1 600 N
Permanent tensile strength	300 N
Kink test	IEC 60794-1-21 E10 The cables do not form a kink when a loop is drawn together to a diameter 12 times the cable nominal diameter.

** Standard torsion test uses 39N weight for real installation approach.*

FIRE PROPERTIES

Flame retardant according to IEC 60332-1-2	Yes
Reaction-to-fire class (acc. EN 13501-6)	Dca
Smoke development class (acc. EN 13501-6)	s2
Euro class flaming droplets/particles (acc. EN 13501-6)	d2
Euro class acidity (acc. EN 13501-6)	a1

ORDERING DETAILS

Product name	Colour outer sheath	Number of fibres	Category (fibre)	Fibre datasheet	DoP number	SAP code
UCFIBRE I T LSHF-FR ES9 3.0 2 OM3B AQ	Turquoise	2	OM3	C31		60058290
UCFIBRE I T LSHF-FR ES9 3.0 2 MM61 SL	Grey	2	OM1	C02		60020038

**DoP Numbers are per product code and any DoP number proves CPR approval for the cable. DoP files can be downloaded from the website: [DoP](#)*

© PRYSMIAN 2026, all rights reserved. All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian; any modification or alteration afterwards of product may give different result. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed to be correct at the time of issue. Prysmian reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by Prysmian.