HOOK UP WIRE RUBBER/PVC/POLYETHYLENE

PVC Hook Up wires available in a variety of put ups.

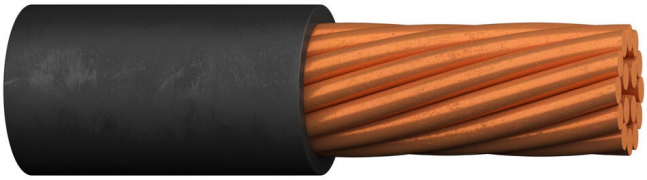

PRODUCT CONSTRUCTION:

Conductor: 20, 18 and 14 AWG fully annealed stranded tinned copper per ASTM B33

Insulation: Premium-grade, color-coded rubber, PVC or polyethylene · Temperature range: -40˚C to +90˚C rubber -30˚C to +105˚C PVC -60˚C to +80˚C polyethylene

Applications: Test equipment

Compliances: RoHS Compliant Directive 2015/863/EU (RoHS-3)

APPLICATION PROPERTIES

Flame retardant	No	Resistant to UV	No
Halogen free	No	Outdoor installation	No
Low smoke	No	Underground installation	No
Oil resistant	No		

STANDARDS AND APPROVALS

RoHS Compliant
Directive EU 2015 / 863

We reserve the right to do changes as a result of running product development and/or changes in standards

ELECTRICAL PROPERTIES

Catalog Number	No. Of. Cond	AWG / Kcmil	Conductor category	Conductor strand count	Insulation thickness [in]	Insulation thickness [mm]	Nominal overall o.d.	Nominal outer diameter [mm]
C1318	1	18	Class 2 = stranded	65/36	0.088	2.24	0.23	5.84
C1321	1	18	Class 2 = stranded	65/36	0.045	1.14	0.15	3.68
C1319	1	20	Class 2 = stranded	41/36	0.047	1.19	0.14	3.56
C1326	1	20	Class 2 = stranded	41/36	0.04	1.02	0.13	3.18

We reserve the right to do changes as a result of running product development and/or changes in standards